

# Ex-it 169 MHz

Robust antenna for 169 MHz applications. The antenna have SMA/m connector. The antenna is equipped with bendable whip.

## Applications

M2M-communications

Telemetric

Automated Meter Reading

Alarms



---

## Technical data



Part number	380
Frequency	169 MHz
VSWR:	< 2:1 on Proant test object
Gain	Max 1 dBi
Height	280 mm
Connector	SMA/m
Temperature	-40 to +85° C
Resistance:	IP65

---

*Note: Subject to change without notice.*

# Performance

Horizontal plane

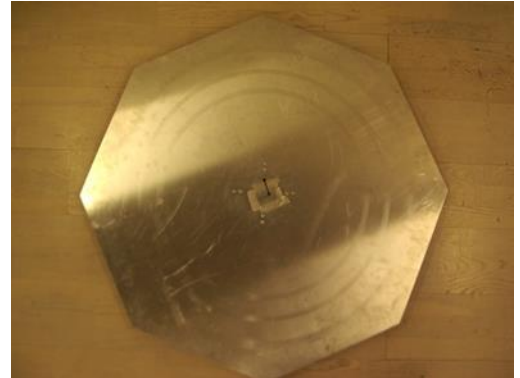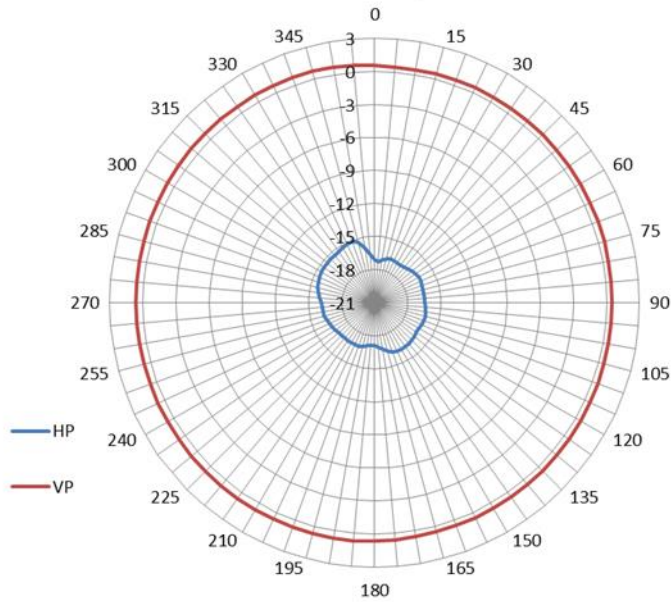

Vertical plane

