


InSide™ GSM/868 Flex

Antenna covering 868 MHz, GSM 900 (880-960 MHz) and GSM 1800, 1900 (1710-1990 MHz) for inside mounting on non-conductive surfaces such as plastic and the antenna includes adhesives for attaching. The inside Flex antenna gives possibility to place the antenna on non-flat surfaces and around corners.

The antenna might need to be retuned to give optimum performance. Please contact ProAnt or distributor for tuning offer.

Applications

M2M-communications
Telemetric
Automated Meter Reading
Alarms

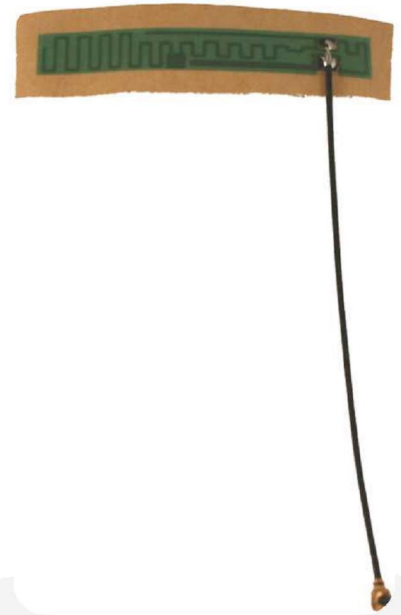

Technical data

Frequency	868-960 and 1710-1990 MHz
VSWR	< 4:1 (on ProAnt demo box)
Gain	Max 3 dBi
Dimension	8 x 56 mm thickness 0.2 mm
Mounting	Adhesive tape
Interface	MHF (U.FL) on 100 mm cable (other options upon request)
Temperature	-40 to +85° C

Note: RoHS compliant. Registered Community Design: 683354-0001. Subject to change without notice.